






SB-18 SUBWOOFER



Features SB-18

- 18" neodymium speaker (5"/125mm voice coil)
- bandpass design
- 12 x M8 mounting points
- M20 pole mount plate
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

SYSTEM 700 for stacking and rigging

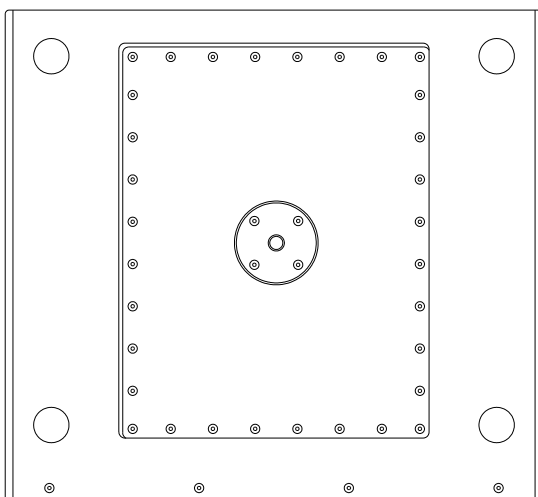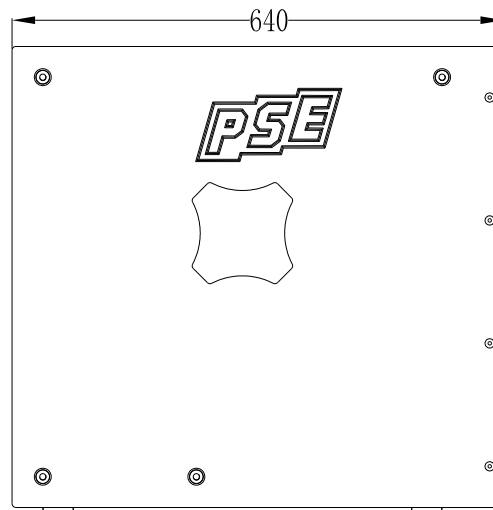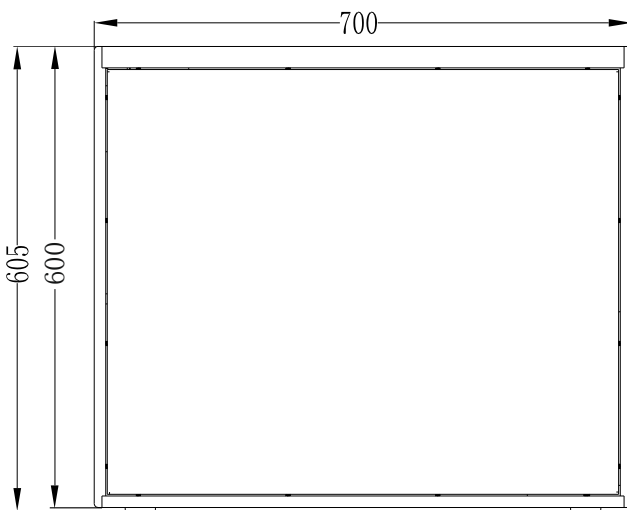

specification

	SB-18
model	SB-18
rated impedance (optional)	8Ω (16Ω)
power handling capacity AES/peak*	1500W / 4500W*
available frequency response**	30Hz-120Hz
max. sound pressure level***	134dB
LF-transducer rated size	18"
LF-transducer voice coil diameter	5"/125mm
LF-transducer magnet structure	neodymium
dimension w/h/d in mm	700/600/640
weight	47.3kg

* peak 10ms, with TD-8000 amplifier and SB-18 max controller setup

** -10dB with SB-18 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and SB-18 SPL controller setup