







# B-12deluxe

## SUBWOOFER

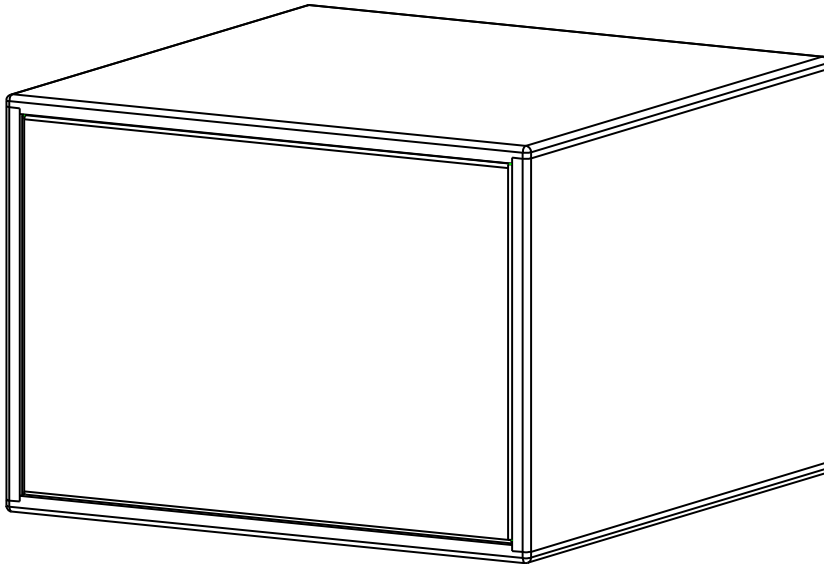

### Features B-12deluxe

- 12" speaker (4"/100mm voice coil)
- bass reflex design
- binding post connection
- perforated steel front grill powder coated
- acoustic foam 10mm
- wood housing 1. class MDF
- polyurea (PU) high scratch proof coating
- high luster lacquer in black
- optional high luster lacquer in white or colours
- optional texture painting white or colours
- optional plane matt painting black or white

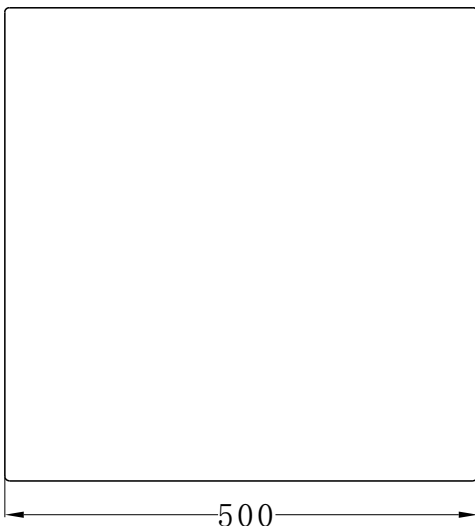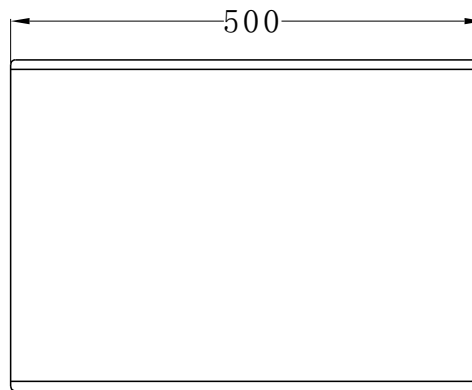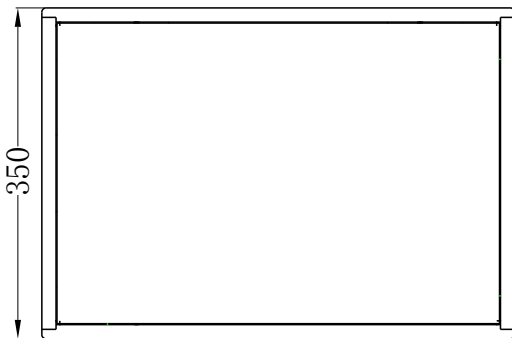

specification	
model	<b>B-12deluxe</b>
rated impedance (optional)	8Ω (16Ω)
power handling capacity AES/peak*	1000W / 3000W*
available frequency response**	43Hz-250Hz
max. sound pressure level***	130dB
LF-transducer rated size	12"
LF-transducer voice coil diameter	4"/100mm
LF-transducer magnet structure	ferrite
dimension w/h/d in mm	500/350/500
weight	21kg

\* peak 10ms, with TD-8000 amplifier and B-12deluxe max controller setup

\*\* -10dB with B-12deluxe FR controller setup

\*\*\*1m free field, pink noise, crest factor 10dB, with TD-8000 and B-12deluxe SPL controller setup