

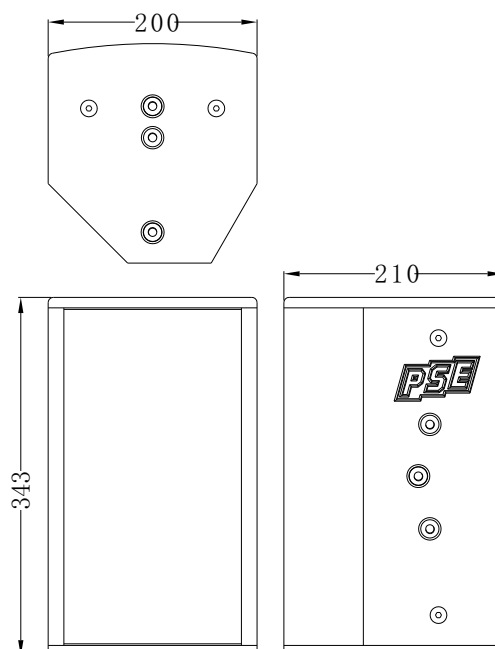


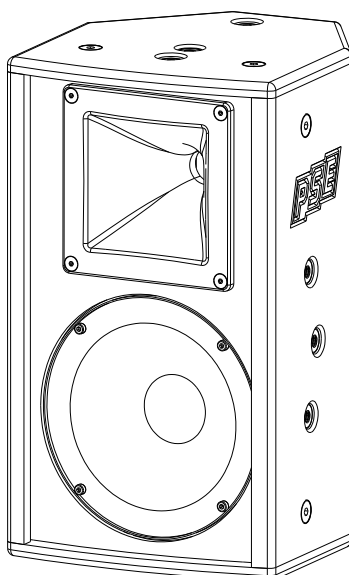

# GS-16



## specification

model	GS-16
rated impedance	8 $\Omega$
operation mode	passive
power handling capacity passive AES/peak*	200W / 500W*
available frequency response**	90Hz-20kHz
max. sound pressure level***	120dB
directivity (h x v)	90°/60° (90° rotatable)
LF-transducer rated size	6.5"
LF-transducer voice coil diameter	35mm/1,35"
LF-transducer magnet structure	ferrite
HF-compression driver rated size (VC)	34mm/1,35"
HF-compression throat diameter	1"
HF-compression magnet structure	ferrite
dimension h/w/d in mm	343/200/210
weight	7kg

\* peak 10ms, with TD-8000 amplifier and GS-16 max controller setup

\*\* -10dB with GS-16 FR controller setup

\*\*\*1m free field, pink noise, crest factor 10dB, with TD-8000 and GS-16 SPL controller setup

## Features GS-16

- 1x6.5" speaker ferrite (35mm voice coil)
- 1x1.35" (34mm) compression driver ferrite
- high frequency horn 1" throat
- horn directivity h90°/v60°
- 90° turnable high frequency horn to v60°/h90°
- multifunction housing
- wedge angle 45° and 30°
- 8 M8 mounting points
- 2 Neutrik speakon 4-pin
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing plywood 15mm
- polyurea (PU) high scratch proof coating


## Appliance GS-16

- high-mid unit for fix installation
- floor monitor
- near fill
- delay line

## Application GS-16

- discotheque, clubs, bars, entertainment
- live events, live entertainment

## small variety of wide range for bass cabinets extension



Disco and Pub



Live-music and touring



Touring and installation